



MW2.3-12

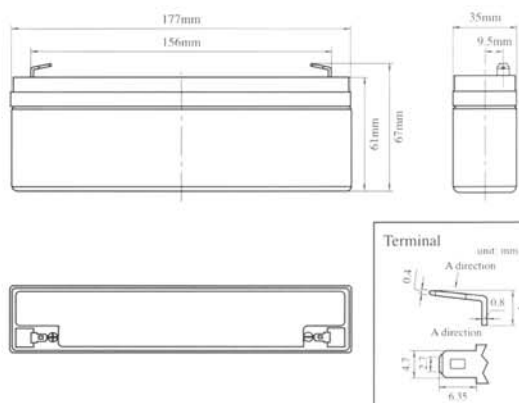

Specifications

Nominal Voltage		6V
Rated Capacity(20 hour rate)		2.3AH
Dimension	Total Height (with terminals)	67mm(2.64inches)
	Height	61mm(2.40inches)
	Length	177mm(6.97inches)
	Width	35mm(1.38inches)
Weight		Approx.0.92kg(2.03lbs)


Discharge characteristics 77°F(25°C)

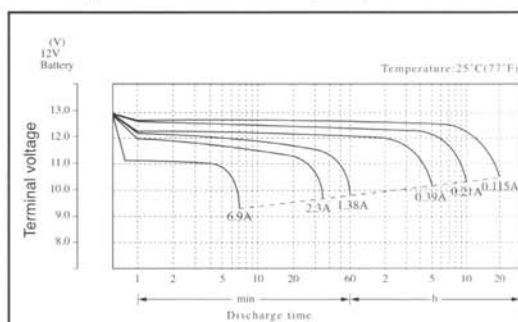

Characteristics

Capacity 77°F(25°C)	20 hour rate(115mA)	2.3AH
	10 hour rate(214mA)	2.14AH
	5 hour rate(392mA)	1.96AH
	1 hour rate(1.38A)	1.38AH
	15 min rate(4A)	1.0AH
Internal Resistance	Full charged Battery 77°F(25°C)	60mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F(25°C)		34.5(5S)
Terminal	Standard	F1
	Optional	F2
Charging (Constant Voltage)	Cycle	Initial Charging Current 460mA Or Small 14.5~14.9V/77°F(25°C)
	Float	13.6~13.8V/77°F(25°C)

Duration of discharge vs. Discharge current

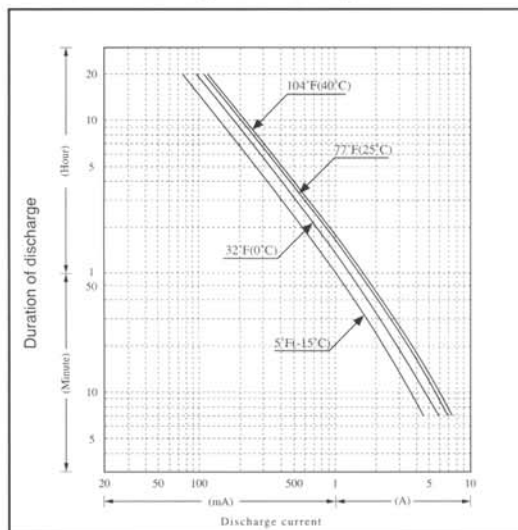

Constant Power Discharge Watts Per Cell @ 77°F(25°C)

Cut off voltageV/cell	5M	10M	15M	30M	40M	60M
1.50V	17.1	11.5	8.8	5.4	4.3	3.1
1.60V	16.5	11.3	8.6	5.3	4.2	3.1
1.67V	16.3	11.0	8.4	5.1	4.1	3.0
1.70V	16.1	10.9	8.2	5.1	4.0	2.9
1.75V	15.8	10.6	8.1	4.8	4.0	2.9

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.

MARWO Battery Factory

5th Floor · China Chem Building · 1 - 13 Lyndhurst Terrace · Central Hong Kong
Tel: (852) 2543 3078 · Fax: (852) 2543 3703 · E-Mail: sales@marwo.hk · Internet: www.marwo.hk