



MW7.0-12

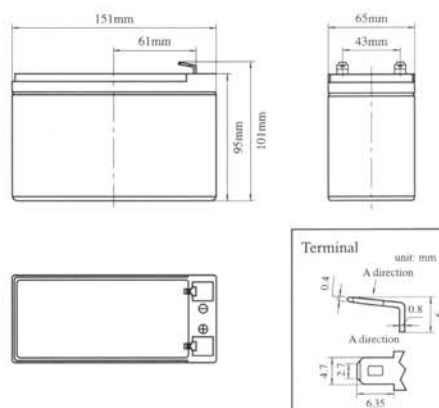

Specifications

Nominal Voltage		12V
Rated Capacity(20 hour rate)		7AH
Dimension	Total Height (with terminals)	101mm(3.98inches)
	Height	95mm(3.74inches)
	Length	151mm(5.94inches)
	Width	65mm(2.56inches)
Weight		Approx.2.64kg(5.82lbs)


Discharge characteristics 77°F(25°C)

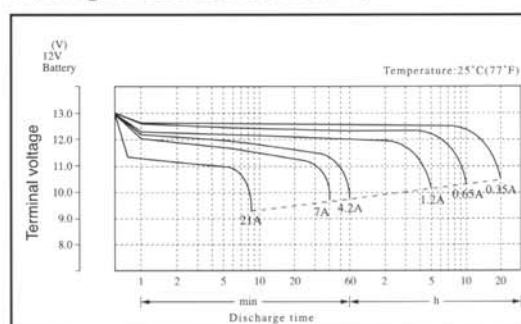

Characteristics

Capacity 77°F(25°C)	20 hour rate(350mA)	7AH
	10 hour rate(650mA)	6.5AH
	5 hour rate(1.2A)	6.0AH
	1 hour rate(4.2A)	4.2AH
	15 min rate(12.24A)	3.06AH
Internal Resistance	Full charged Battery 77°F(25°C)	19mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F(25°C)	105A(5S)	
Terminal	Standard	F1
	Optional	F2
Charging (Constant Voltage)	Cycle	Initial Charging Current 1.4A Or Small 14.5V~14.9V/77°F(25°C)
	Float	13.6V~13.8V/77°F(25°C)

Duration of discharge vs. Discharge current

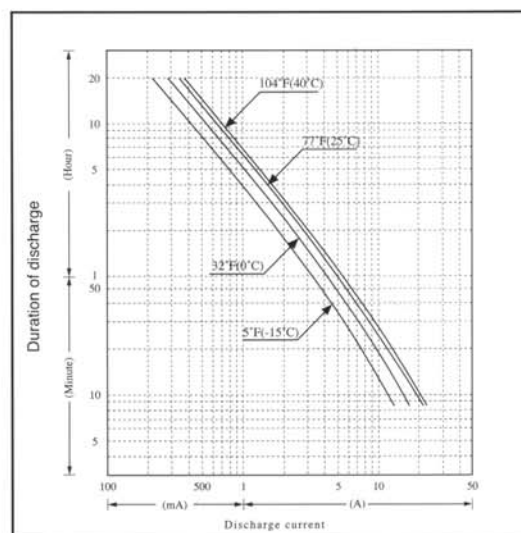

Constant Power Discharge Watts Per Cell @ 77°F(25°C)

Cut off voltageV/cell	5M	10M	15M	30M	40M	60M
1.50V	54.7	36.6	28.1	17.0	13.9	9.9
1.60V	53.2	35.9	27.3	16.6	13.3	9.7
1.67V	52.1	35.1	26.8	16.3	13.1	9.5
1.70V	51.5	34.7	26.3	15.9	13.0	9.3
1.75V	50.4	34.0	25.9	15.8	12.6	9.1

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.

MARWO Battery Factory

5th Floor · China Chem Building · 1 - 13 Lyndhurst Terrace · Central Hong Kong
Tel: (852) 2543 3078 · Fax: (852) 2543 3703 · E-Mail: sales@marwo.hk · Internet: www.marwo.hk