



MW20-12

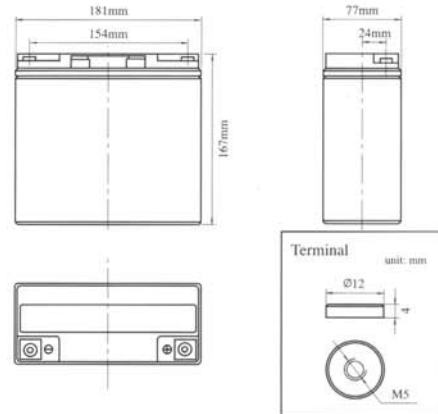

Specifications

Nominal Voltage		12V
Rated Capacity(20 hour rate)		20AH
Dimension	Total Height (with terminals)	167mm(6.57inches)
	Height	167mm(6.57inches)
	Length	181mm(7.13inches)
	Width	77mm(3.03inches)
Weight		Approx.6.44kg(14.20lbs)


Discharge characteristics 77°F(25°C)

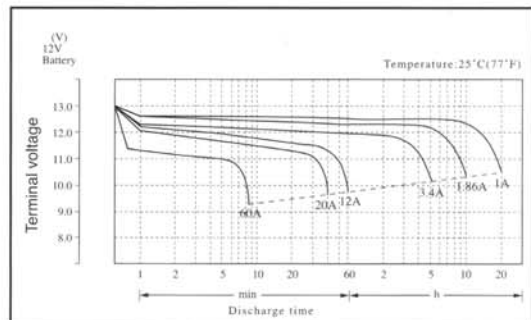

Characteristics

Capacity 77°F(25°C)	20 hour rate(1A)	20AH
	10 hour rate(1.86A)	18.6AH
	5 hour rate(3.4A)	17AH
	1 hour rate(12A)	12AH
	15 min rate(35A)	8.75AH
Internal Resistance	Full charged Battery 77°F(25°C)	11mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F(25°C)	300A(5S)	
Terminal	Standard	F12
	Optional	F3
Charging (Constant Voltage)	Cycle	Initial Charging Current 4A Or Small 14.5V~14.9V/77°F(25°C)
	Float	13.6V~13.8V/77°F(25°C)

Duration of discharge vs. Discharge current

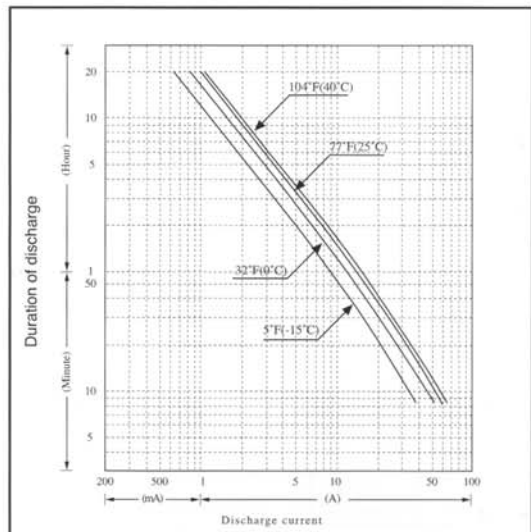

Constant Power Discharge Watts Per Cell @ 77°F(25°C)

Cut off voltageV/cell	5M	10M	15M	30M	40M	60M
1.50V	152.0	97.9	76.5	44.8	39.9	29.6
1.60V	150.8	97.0	75.6	44.1	39.2	29.1
1.67V	148.8	96.0	75.0	43.7	38.9	28.8
1.70V	146.3	95.1	74.5	43.1	38.4	28.3
1.75V	145.2	94.1	73.5	42.5	37.7	27.7

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.

MARWO Battery Factory

5th Floor · China Chem Building · 1 - 13 Lyndhurst Terrace · Central Hong Kong
Tel: (852) 2543 3078 · Fax: (852) 2543 3703 · E-Mail: sales@marwo.hk · Internet: www.marwo.hk